

ISSN 2518-170X (Online)

ISSN 2224-5278 (Print)

**NEWS OF THE NATIONAL ACADEMY
OF SCIENCES OF THE REPUBLIC
OF KAZAKHSTAN, SERIES OF
GEOLOGY AND TECHNICAL SCIENCES**

№2

2026

ISSN 2518-170X (Online)

ISSN 2224-5278 (Print)



N E W S
OF THE NATIONAL ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN,
SERIES OF GEOLOGY AND TECHNICAL
SCIENCES

2 (476)
MARCH – APRIL 2026

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, 2026



Scopus®



The scientific journal News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences has been indexed in the international abstract and citation database Scopus since 2016 and demonstrates stable bibliometric performance.

The journal is also included in the Emerging Sources Citation Index (ESCI) of the Web of Science platform (Clarivate Analytics, since 2018).

Indexing in ESCI confirms the journal's compliance with international standards of scientific peer review and editorial ethics and is considered by Clarivate Analytics as part of the evaluation process for potential inclusion in the Science Citation Index Expanded (SCIE), Social Sciences Citation Index (SSCI), and Arts & Humanities Citation Index (AHCI).

Indexing in Scopus and Web of Science ensures high international visibility of publications, promotes citation growth, and reflects the editorial board's commitment to publishing relevant, original, and scientifically significant research in the fields of geology and technical sciences.

«Қазақстан Республикасы Ұлттық ғылым академиясының Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналы 2016 жылдан бастап халықаралық реферативтік және ғылымиметриялық Scopus дерекқорында индекстеледі және тұрақты библиометриялық көрсеткіштерді көрсетіп келеді.

Сонымен қатар журнал Web of Science платформасының (Clarivate Analytics, 2018) халықаралық реферативтік және наукометриялық дерекқоры Emerging Sources Citation Index (ESCI) тізіміне енгізілген.

ESCI дерекқорында индекстелуі журналдың халықаралық ғылыми рецензиялау талаптары мен редакциялық этика стандарттарына сәйкестігін растайды, сондай-ақ Clarivate Analytics компаниясы тарапынан басылмды Science Citation Index Expanded (SCIE), Social Sciences Citation Index (SSCI) және Arts & Humanities Citation Index (AHCI) дерекқорларына енгізу қарастырылуда.

Scopus және Web of Science дерекқорларында индекстелуі жарияланымдардың халықаралық деңгейде жоғары сұранысқа ие болуын қамтамасыз етеді, олардың дәйексөз алу көрсеткіштерінің артуына ықпал етеді және редакциялық алқаның геология мен техникалық ғылымдар саласындағы өзекті, бірегей және ғылыми тұрғыдан маңызды зерттеулерді жариялауға ұмтылысын айқындайды.

Научный журнал «News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences» с 2016 года индексируется в международной реферативной и наукометрической базе данных Scopus и демонстрирует стабильные библиометрические показатели.

Журнал также включён в международную реферативную и наукометрическую базу данных Emerging Sources Citation Index (ESCI) платформы Web of Science (Clarivate Analytics, 2018).

Индексирование в ESCI подтверждает соответствие журнала международным стандартам научного рецензирования и редакционной этики, а также рассматривается компанией Clarivate Analytics в рамках дальнейшего включения издания в Science Citation Index Expanded (SCIE), Social Sciences Citation Index (SSCI) и Arts & Humanities Citation Index (AHCI).

Индексирование в Scopus и Web of Science обеспечивает высокую международную востребованность публикаций, способствует росту цитируемости и подтверждает стремление редакционной коллегии публиковать актуальные, оригинальные и научно значимые исследования в области геологии и технических наук.

EDITOR-IN-CHIEF

ZHURINOV Murat Zhurinovich, Doctor of Chemical Sciences, Professor, Academician of IAAS and NAS RK, General Director of the Research Institute of Petroleum Refining and Petrochemicals (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=6602177960>; <https://www.webofscience.com/wos/author/record/2017489>

DEPUTY EDITOR-IN-CHIEF

ABSADYKOV Bakhyt Narikbayevich, Doctor of Technical Sciences, Professor, Academician of NAS RK, Satbayev University (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=6504694468>; <https://www.webofscience.com/wos/author/record/2411827>

EDITORIAL BOARD:

ABSAMETOV Malis Kudysovich, Doctor of Geological and Mineralogical Sciences, Professor, Academician of NAS RK, Director of the U.M. Akhmedsafa Institute of Hydrogeology and Geoecology (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=56955769200>; <https://www.webofscience.com/wos/author/record/1937883>

ZHOLTAEV Geroy Zholtaevich, Doctor of Geological and Mineralogical Sciences, Professor, Honorary Academician of NAS RK (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=57112610200>; <https://www.webofscience.com/wos/author/record/1939201>

SNOW Daniel, PhD, Associate Professor, Director, Aquatic Sciences Laboratory, University of Nebraska (Nebraska, USA), <https://www.scopus.com/authid/detail.uri?authorId=7103259215>; <https://www.webofscience.com/wos/author/record/1429613>

SELTMAN Reimar, PhD, Head of Petrology and Mineral Deposits Research in the Earth Sciences Department, Natural History Museum (London, Great Britain), <https://www.scopus.com/authid/detail.uri?authorId=55883084800>; <https://www.webofscience.com/wos/author/record/1048681>

PANFILOV Mikhail Borisovich, Doctor of Technical Sciences, Professor at the University of Nancy (Nancy, France), <https://www.scopus.com/authid/detail.uri?authorId=7003436752>; <https://www.webofscience.com/wos/author/record/1230499>

SHEN Ping, PhD, Deputy Director of the Mining Geology Committee of the Chinese Geological Society, Member of the American Association of Economic Geologists (Beijing, China), <https://www.scopus.com/authid/detail.uri?authorId=57202873965>; <https://www.webofscience.com/wos/author/record/1753209>

FISCHER Axel, PhD, Associate Professor, Technical University of Dresden (Dresden, Germany), <https://www.scopus.com/authid/detail.uri?authorId=35738572100>; <https://www.webofscience.com/wos/author/record/2085986>

AGABEKOV Vladimir Enokovich, Doctor of Chemical Sciences, Academician of NAS of Belarus, Honorary Director of the Institute of Chemistry of New Materials (Minsk, Belarus), <https://www.scopus.com/authid/detail.uri?authorId=7004624845>

CATALIN Stefan, PhD, Associate Professor, Technical University of Dresden (Dresden, Germany), <https://www.scopus.com/authid/detail.uri?authorId=35203904500>; <https://www.webofscience.com/wos/author/record/1309251>

JAY Sagin, PhD, Associate Professor, Nazarbayev University (Astana, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=57204467637>; <https://www.webofscience.com/wos/author/record/907886>

FRATTINI Paolo, PhD, Associate Professor, University of Milano - Bicocca (Milan, Italy), <https://www.scopus.com/authid/detail.uri?authorId=56538922400>

NURPEISOVA Marzhan Baysanovna, Doctor of Technical Sciences, Professor of Satbayev University (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=57202218883>; <https://www.webofscience.com/wos/author/record/AAD-1173-2019>

RATOV Boranbay Tovbasarovich, Doctor of Technical Sciences, Professor, Head of the Department of Geophysics and Seismology, Satbayev University (Almaty, Kazakhstan), <https://www.scopus.com/authid/detail.uri?authorId=55927684100>; <https://www.webofscience.com/wos/author/record/1993614>

RONNY Berndtsson, Professor, Director of the Centre for Advanced Middle Eastern Studies, Lund University (Lund, Sweden), <https://www.scopus.com/authid/detail.uri?authorId=7005388716>; <https://www.webofscience.com/wos/author/record/1324908>

MIRLAS Vladimir, PhD, Professor, Eastern R&D Center, Ariel University (Ariel, Israel), <https://www.scopus.com/authid/detail.uri?authorId=8610969300>; <https://www.webofscience.com/wos/author/record/53680261>

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: «Central Asian Academic Research Center» LLP (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Communications of the Republic of Kazakhstan № KZ50VPY00121155, issued on 05.06.2025
Thematic scope: *geology, hydrogeology, geography, mining and chemical technologies of oil, gas and metals*
Periodicity: 6 times a year.

<http://www.geolog-technical.kz/index.php/en/>

© «Central Asian Academic Research Center» LLP, 2026.

БАС РЕДАКТОР

ЖҰРЫНОВ Мұрат Жұрынуұлы, химия ғылымдарының докторы, профессор, ХҒАҚ және ҚР ҰҒА академигі, Мұнай өңдеу және мұнай-химиясы ғылыми-зерттеу институтының бас директоры (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=6602177960>; <https://www.webofscience.com/wos/author/record/2017489>

БАС РЕДАКТОРДЫҢ ОРЫНБАСАРЫ:

АБСАДЫҚОВ Бақыт Нәрікбайұлы, техника ғылымдарының докторы, профессор, ҚР ҰҒА академигі, Қ.И. Сәтбаев атындағы Қазақ ұлттық техникалық зерттеу университеті (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=6504694468>; <https://www.webofscience.com/wos/author/record/2411827>

РЕДАКЦИЯ АЛҚАСЫ:

ӨБСӘМЕТОВ Мәліс Құдысұлы, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, У.М. Ахмедсафин атындағы Гидрогеология және геоэкология институтының директоры (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=56955769200>; <https://www.webofscience.com/wos/author/record/1937883>

ЖОЛТАЕВ Герой Жолтайұлы, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА құрметті академигі (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=57112610200>; <https://www.webofscience.com/wos/author/record/1939201>

СНОУ Дэниел, PhD, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска, АҚШ), <https://www.scopus.com/authid/detail.uri?authorId=7103259215>; <https://www.webofscience.com/wos/author/record/1429613>

ЗЕЛБТМАНН Раймар, PhD, Жер туралы ғылымдар бөлімінің петрология және пайдалы қазбалар кен орындары саласындағы зерттеулерінің жетекшісі, Табиғи тарих мұражайы (Лондон, Ұлыбритания), <https://www.scopus.com/authid/detail.uri?authorId=55883084800>; <https://www.webofscience.com/wos/author/record/1048681>

ПАНФИЛОВ Михаил Борисович, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция), <https://www.scopus.com/authid/detail.uri?authorId=7003436752>; <https://www.webofscience.com/wos/author/record/1230499>

ШЕН Пин, PhD, Қытай геологиялық қоғамының Тау-кен геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастығының мүшесі (Бейжің, Қытай), <https://www.scopus.com/authid/detail.uri?authorId=57202873965>; <https://www.webofscience.com/wos/author/record/1753209>

ФИШЕР Аксель, PhD, қауымдастырылған профессор, Дрезден техникалық университеті (Дрезден, Германия), <https://www.scopus.com/authid/detail.uri?authorId=35738572100>; <https://www.webofscience.com/wos/author/record/2085986>

АГАБЕКОВ Владимир Енокович, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жаңа материалдар химиясы институтының құрметті директоры (Минск, Беларусь), <https://www.scopus.com/authid/detail.uri?authorId=7004624845>

КАТАЛИН Стефан, PhD, қауымдастырылған профессор, Дрезден Техникалық университеті (Дрезден, Германия), <https://www.scopus.com/authid/detail.uri?authorId=35203904500>; <https://www.webofscience.com/wos/author/record/1309251>

САҒЫНТАЕВ Жанай, PhD, қауымдастырылған профессор, Назарбаев университеті (Астана, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=57204467637>; <https://www.webofscience.com/wos/author/record/907886>

ФРАТТИНИ Паоло, PhD, қауымдастырылған профессор, Бикокк Милан университеті (Милан, Италия), <https://www.scopus.com/authid/detail.uri?authorId=56538922400>

НҮРПЕЙІСОВА Маржан Байсанқызы, техника ғылымдарының докторы, Қ.И. Сәтбаев атындағы Қазақ ұлттық техникалық зерттеу университетінің профессоры (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=57202218883>; <https://www.webofscience.com/wos/author/record/AAD-1173-2019>

РАТОВ Боранбай Товбасарович, техника ғылымдарының докторы, профессор, «Геофизика және сейсмология» кафедрасының меңгерушісі, Қ.И. Сәтбаев атындағы Қазақ ұлттық техникалық зерттеу университеті (Алматы, Қазақстан), <https://www.scopus.com/authid/detail.uri?authorId=55927684100>; <https://www.webofscience.com/wos/author/record/1993614>

РОННИ Беридтссон, профессор, Таяу Шығысты заманауи зерттеу орталығының директоры, Лунд университеті (Лунд, Швеция), <https://www.scopus.com/authid/detail.uri?authorId=7005388716>; <https://www.webofscience.com/wos/author/record/1324908>

МИРІАС Владимир, PhD, профессор, Ариэль университетінің Шығыс ғылыми-зерттеу орталығы (Ариэль, Израиль), <https://www.scopus.com/authid/detail.uri?authorId=8610969300>; <https://www.webofscience.com/wos/author/record/53680261>

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктеуші: «Орталық Азия академиялық ғылыми орталығы» ЖШС (Алматы қ.).

Қазақстан Республикасының Ақпарат және коммуникациялар министрлігінің Ақпарат комитетінде 05.06.2025 ж. берілген № KZ50VPY00121155 мерзімдік басылым тіркеуіне қойылу туралы куәлік. Тақырыптық бағыты: *геология, гидрогеология, география, тау-кен ісі, мұнай, газ және металдардың химиялық технологиялары*

Мерзімділігі: жылына 6 рет.

<http://www.geolog-technical.kz/index.php/en/>

ГЛАВНЫЙ РЕДАКТОР

ЖУРИНОВ Мурат Журинович, доктор химических наук, профессор, академик МАН и НАН РК, Генеральный директор НИИ нефтепереработки и нефтехимии (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=6602177960>; <https://www.webofscience.com/wos/author/record/2017489>

ЗАМЕСТИТЕЛЬ ГЛАВНОГО РЕДАКТОРА

АБСАДЫКОВ Бахыт Нарикбаевич, доктор технических наук, профессор, академик НАН РК, Казахский национальный исследовательский технический университет им. К.И. Сатпаева (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=6504694468>; <https://www.webofscience.com/wos/author/record/2411827>

РЕДАКЦИОННАЯ КОЛЛЕГИЯ:

АБСАМЕТОВ Малис Кудысович, доктор геолого-минералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=56955769200>; <https://www.webofscience.com/wos/author/record/1937883>

ЖОЛТАЕВ Герой Жолтаевич, доктор геолого-минералогических наук, профессор, почетный академик НАН РК (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=57112610200>; <https://www.webofscience.com/wos/author/record/1939201>

СНОУ Дэниел, PhD, ассоциированный профессор, директор Лаборатории водных наук Университета Небраски (Небраска, США), <https://www.scopus.com/authid/detail.uri?authorId=7103259215>; <https://www.webofscience.com/wos/author/record/1429613>

ЗЕЛЬТМАНН Раймар, PhD, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Великобритания), <https://www.scopus.com/authid/detail.uri?authorId=55883084800>; <https://www.webofscience.com/wos/author/record/1048681>

ПАНФИЛОВ Михаил Борисович, доктор технических наук, профессор Университета Нанси (Нанси, Франция), <https://www.scopus.com/authid/detail.uri?authorId=7003436752>; <https://www.webofscience.com/wos/author/record/1230499>

ШЕН Пин, PhD, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай), <https://www.scopus.com/authid/detail.uri?authorId=57202873965>; <https://www.webofscience.com/wos/author/record/1753209>

ФИШЕР Аксель, PhD, ассоциированный профессор, Технический университет Дрезден (Дрезден, Берлин), <https://www.scopus.com/authid/detail.uri?authorId=35738572100>; <https://www.webofscience.com/wos/author/record/2085986>

АГАБЕКОВ Владимир Енокович, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь), <https://www.scopus.com/authid/detail.uri?authorId=7004624845>

КАТАЛИН Стефан, PhD, ассоциированный профессор, Технический университет Дрезден (Дрезден, Германия), <https://www.scopus.com/authid/detail.uri?authorId=35203904500>; <https://www.webofscience.com/wos/author/record/1309251>

САГИНТАЕВ Жанай, PhD, ассоциированный профессор, Назарбаев университет (Астана, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=57204467637>; <https://www.webofscience.com/wos/author/record/907886>

ФРАТТИНИ Паоло, PhD, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия), <https://www.scopus.com/authid/detail.uri?authorId=56538922400>

НУРПЕИСОВА Маржан Байсановна, доктор технических наук, профессор Казахского национального исследовательского технического университета им. К.И. Сатпаева (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=57202218883>; <https://www.webofscience.com/wos/author/record/AAD-1173-2019>

РАТОВ Боранбай Товбасарович, доктор технических наук, профессор, заведующий кафедрой «Геофизика и сейсмология», Казахский национальный исследовательский технический университет им. К.И. Сатпаева (Алматы, Казахстан), <https://www.scopus.com/authid/detail.uri?authorId=55927684100>; <https://www.webofscience.com/wos/author/record/1993614>

РОННИ Берндтссон, профессор, Директор Центра современных ближневосточных исследований, Лундский университет (Лунд, Швеция), <https://www.scopus.com/authid/detail.uri?authorId=7005388716>; <https://www.webofscience.com/wos/author/record/1324908>

МИРЛАС Владимир, PhD, профессор, Восточный научно-исследовательский центр, Университет Ариэля (Ариэль, Израиль), <https://www.scopus.com/authid/detail.uri?authorId=8610969300>; <https://www.webofscience.com/wos/author/record/53680261>

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: ТОО «Центрально-Азиатский академический научный центр» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и коммуникаций и Республики Казахстан № KZ50VPY00121155, выданное 05.06.2025 г.

Тематическая направленность: *геология, гидрогеология, география, горное дело и химические технологии нефти, газа и металлов*

Периодичность: 6 раз в год.

<http://www.geolog-technical.kz/index.php/en/>

© ТОО «Центрально-Азиатский академический научный центр», 2026.

CONTENTS

Abetov A.E., Seitzhanov A.K., Samenov Y.R., Zhassymbek S.A. Machine learning and neural networks for lithofacies mapping and reservoir property evaluation of core samples.....	8
Aitkaliyev A.K., Pak Y.N., Kolmakov Y.V., Pak D.Y., Matishev T.V. Application of the X-Ray radiometric method to improve the operational quality control of copper ores during geological testing.....	26
Altay Y.A., Karymsakova N.T., Fedorov A.V., Absadykov D.B., Ismagul G.K. Predictive control of diagnostically significant parameters of acoustic emission using machine learning: new data.....	41
Astanakulov K.D., Kodirova M.G., Saydumarov B., Nersesyan D.V., Kurashkin S.O. Resource potential of ecological and geological systems of allocated soil masses.....	58
Avazov Sh.B., Yodgorov Sh.I., Mukhammadkulov N.M., Aktamov B.U., Khayriddinov B.B. Instrumental seismometric assessment of the impact of technogenic seismic vibrations on the structural stability of historical objects.....	74
Baskanbayeva D., Kalmaganbetov S., Sabirova L., Zholdybayeva G., Koptleuov K. CFD analysis of screw compressor rotor geometry influence on gas compression efficiency in geology.....	92
Borotov A.N., Karshiev F.U., Igamberdiyev A.A., Grigoryan A.G., Sarigo N.V. Ecological aspects of resource conservation in the development of mineral deposits.....	107
Gerasidi V.V., Lisachenko A.V., Apatenko A.S., Sevryugina N.S., Fomin A.Y. Analysis of the application of non-destructive testing methods for assessing the technical condition of mining equipment motors based on vibration parameters.....	121
Hajiyeva A.Z., Ibrahimova L.P., Humbatova Sh.Y., Jafarova F.M. Ecological processes of vertical landscape transformation and their manifestation in the natural landscapes of Nakhchivan.....	135
Jakiyayev D.K., Nussipali R.K.*, Malibekov A.K., Jakiyayev B.D., Zhashen S.Zh. Statistical model of multi-cycle fatigue of steel structural elements under a complex non-uniform stress state.....	149
Jumatov Y.K., Tashbulatov S.B., Pushanov A.N., Kozenkova G.L., Yarygina I.V. Technological substantiation of sustainable mining reclamation of disturbed lands in open pit operations.....	169
Kainenova T.S., Kosmbaeva G.T., Bissembayeva K.T., Otarbayeva A.T., Orazbek A.A. Effectiveness of measures to regulate the development process at the Alibekmola field.....	185

Koishiyeva G.Zh., Yerimova A.Zh., Kurbaniyazov S.K., Agaidarova K.H., Abdraimova K.T. Radiological properties and stratigraphic significance of glauconite-bearing formations: implications for paleoenvironments and geochemical zonation.....	203
Kondratiev V.V., Bryukhanova N.N., Kononenko R.V., Gladkikh V.A., Matasova I.Y. Environmental and technological assessment of beneficiation tailings reprocessing based on mechanical activation and non-ferrous metals leaching.....	223
Kuldeyev Ye., Negmatov S., Nurpeissova M., Kirgizbaeva D., Donenbayeva N. Geodynamic Polygon of the Zhilandy Ore Field: Results and Prospects.....	237
Madibekov A., Christian Opp., Karimov A., Ismukhanova L., Zhadi A. Regularities of distribution and accumulation factors of heavymetals in soils of the Zhetysu region (Kazakhstan).....	253
Malikov G.I., Musayeva S.A., Mammadov K.S., Jabiyeva U.M., Jafarova K.V. Effects of hydrocarbon fuel quality fluctuations on energy generation efficiency, economic viability, and environmental footprint.....	272
Narbaev M.T., Ismailova G.K., Narbaeva K.T., Burlibayeva D.M., Groll M. Assessment of ecological and water management parameters of the Syrdarya River.....	290
Nurmagambetov A. On seismic hazard of Almaty and tectonic faults in the city.....	309
Permana A.P., Kasim M., Hutagalung R., Uno D.A.N., Sandi I.N. petrographic, provenance, and tectonic setting of Dolokapa formation sandstone, North Gorontalo.....	319
Ratov B.T., Khomenko V.L., Yavorska O.O., Koroviaka Ye.A., Akhmetova N.S. Analytical and structural justification of a wellhead sealing device for large-diameter drilling operations.....	335
Skrobala V.M., Popovych V.V., Kopylov V.P., Popovych N.P. Comprehensive assessment of heavy metal pollution of a river within a large city.....	355
Sunakbaeva D.Kh., Yuldashbek D.Kh., Aitekova K., Seitbayev K.Zh. Monitoring heavy metals in soils and waters of the City of Turkestan: geoecological aspect.....	371
Zakirov M.M., Agzamova I.A., Ochilov G.E., Gulyamov G.D., Xudayberdiyev T.M. Analysis of the results of changes in the gas and isotopic composition of groundwater during the period of earthquake preparation.....	385
Zhanbatyrov A.A., Tukhfatov Zh.K., Bektay E.K., Turisbekova G.S., Zhanbatyrov N.A. Current state of potash ore development in the Caspian lowlands of the Republic of Kazakhstan: problems and solutions.....	309

NEWS OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC
OF KAZAKHSTAN, SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 2.

Number 476 (2026), 26–40

<https://doi.org/10.32014/2026.2518-170X.613>

UDC: 551:504.05:502.5

IRSTI: 38.27.01

©Aitkaliyev A.K.^{1*}, Pak Y.N.¹, Kolmakov Y.V.², Pak D.Y.¹,
Matishev T.V.³, 2026.

¹Karaganda Technical University, Karaganda, Kazakhstan;

²Tomsk Polytechnic University, Tomsk, Russian Federation;

³Kazakhmys Corporation, Karaganda, Kazakhstan.

*E-mail: aitkaliyev86@gmail.com

APPLICATION OF THE X-RAY RADIOMETRIC METHOD TO IMPROVE THE OPERATIONAL QUALITY CONTROL OF COPPER ORES DURING GEOLOGICAL TESTING

Aitkaliyev Ardak — Master, Karaganda Technical University, Karaganda, Kazakhstan,

E-mail: aitkaliyev86@gmail.com, <https://orcid.org/0009-0002-7305-8644>;

Pak Yurii — Doctor of Technical Sciences, Professor, Karaganda Technical University, Karaganda, Kazakhstan,

E-mail: pak_gos@mail.ru, <https://orcid.org/0000-0002-0699-6764>;

Kolmakov Yuri — Doctor of Geological and Mineralogical Sciences, Associate Professor, Tomsk Polytechnic University, Tomsk, Russian Federation,

E-mail: kolmakovyv@tpu.ru, <https://orcid.org/0009-0002-7305-8644>;

Pak Dmitri — Candidate of Technical Sciences, ass. Professor, Karaganda Technical University, Karaganda, Kazakhstan,

E-mail: pak_kargtu@mail.ru, <https://orcid.org/0000-0002-7215-7846>;

Matishev Talgat — Mining engineer, chief geologist, Kazakhmys Corporation, Karaganda, Kazakhstan,

E-mail: matishevt@mail.ru, <https://orcid.org/0009-0008-0333-0466>.

Abstract. Relevance. The traditional sampling of copper ores is characterized by high labor intensity, long technological process and relatively low representativeness, as a result, chemical analysis takes a relatively small amount of material of about 50 grams (Industry standard, 2005; Instruction on Internal, 1982).

Purpose. Improvement of the existing system of standard testing of copper ores in the direction of reducing financial costs, labor intensity, increasing efficiency and accuracy of obtaining representative information on copper content from core sampling data.

The quality control of ores during their extraction is carried out by core

testing. Due to the fact that the sampling methods used at enterprises include operations for sampling, delivery to the laboratory, processing, and analysis of samples, they are time-consuming, expensive, and unsuitable as a means of obtaining information for operational impacts on the technological process. *Methods.* From these positions, significant prospects are opened by the advent of X-ray radiometric sampling (hereinafter referred to as RRR), which allows us to proceed to the rapid determination of the components of interest without sampling, directly in the conditions of natural occurrence of rocks and ores. It makes it possible to reduce the duration of testing to several minutes or seconds, significantly reduce the cost of work while increasing the amount of information to the required completeness.

Results and conclusions. The results obtained indicate the possibility of core testing by X-ray fluorescence of copper in crushed representative samples of class -1 mm. A more representative sampling of the core itself (its rounded and flat surfaces of the sawn core) makes it possible to quickly separate the ore and rock intervals.

Keywords: X-ray radiometric testing, standard testing method, representativeness

For citations: Aitkaliyev A.K., Pak Y.N., Kolmakov Y.V., Pak D.Y., Matishev T.V. *Application of the X-Ray Radiometric Method to Improve the Operational Quality Control of Copper Ores during Geological Testing. News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences.* 2026. No.2. Pp. 26–40. DOI: <https://doi.org/10.32014/2026.2518-170X.613>

©Айтқалиев А.Қ.^{1*}, Пак Ю.Н.¹, Колмаков Ю.В.², Пак Д.Ю.¹,
Матишев Т.В.³, 2026.

¹Қарағанды техникалық университеті, Қарағанды, Қазақстан;

²Томск политехникалық университеті, Томск, Ресей Федерациясы;

³Қазақмыс Корпорациясы, Қарағанды, Қазақстан.

*E-mail: aitkaliyev86@gmail.com

ГЕОЛОГИЯЛЫҚ СЫНАУ КЕЗІНДЕ МЫС КЕНДЕРІНІҢ САПАСЫН ЖЕДЕЛ БАҚЫЛАУДЫ ЖЕТІЛДІРУ ҮШІН РЕНТГЕН РАДИОМЕТРИЯЛЫҚ ӘДІСТІ ҚОЛДАНУ

Айтқалиев Ардақ — магистр, Қарағанды техникалық университеті, Қарағанды, Қазақстан,
E-mail: aitkaliyev86@gmail.com, <https://orcid.org/0009-0002-7305-8644>;

Пак Юрий — техника ғылымдарының докторы, профессор, Қарағанды техникалық университеті, Қарағанды, Қазақстан,

E-mail: pak_gos@mail.ru, <https://orcid.org/0000-0002-0699-6764>;

Колмаков Юрий — техника ғылымдарының докторы, қауымдастырылған профессор, Томск политехникалық университеті, Томск, Ресей Федерациясы,

E-mail: kolmakovyv@tpu.ru, [https:// orcid.org/0009-0002-7305-8644](https://orcid.org/0009-0002-7305-8644);

Пак Дмитрий — техника ғылымдарының кандидаты, қауымдастырылған профессор, Қарағанды техникалық университеті, Қарағанды, Қазақстан,

E-mail: pak_kargtu@mail.ru, [https:// orcid.org/0000-0002-7215-7846](https://orcid.org/0000-0002-7215-7846);

Матишев Талгат — тау-кен инженері, «Қазақмыс» корпорациясының бас геологы, Қарағанды, Қазақстан,

E-mail: matishevt@mail.ru, <https://orcid.org/0009-0008-0333-0466>.

Аннотация. *Өзектілігі.* Дәстүрлі мыс кендерін сынау әдістері, әдетте, жоғары еңбек сыйымдылығымен, технологиялық операциялардың ұзақтығымен және тиімділік деңгейінің салыстырмалы түрде төмен болуымен ерекшеленеді. Бұл, ең алдымен, химиялық талдауға пайдаланылатын материал көлемінің аздығымен түсіндіріледі – орта есеппен шамамен 50 грамм ғана (Industry standard, 2005; Instruction on Internal, 1982).

Мақсаты. Мыс кендерін стандартты сынау жүйесін жетілдіру өндірістік шығындарды қысқартуға, еңбек ресурстарына түсетін жүктемені азайтуға, талдау жеделдігін арттыруға, сондай-ақ керндік материалдар бойынша мыс мөлшерін анықтау дәлдігін жоғарылатуға бағытталады.

Кен өндіру процесінде шикізат сапасын бақылау негізінен базалық сынау арқылы жүзеге асырылады. Алайда өндірістік кәсіпорындарда қолданылатын сынау тәсілдері сынама іріктеу, оны зертханаға тасымалдау, алдын ала өңдеу және талдау кезеңдерін қамтитындықтан, олар көп еңбекті қажет етеді, экономикалық тұрғыдан шығынды және технологиялық процесті жедел басқару үшін жеткілікті жылдам ақпарат бермейді. *Әдістер.* Осы тұрғыдан рентген-радиометриялық сынау (бұдан әрі – РРО) әдісін қолдану айтарлықтай мүмкіндіктер ұсынады. Бұл тәсіл тау жыныстары мен кендерді табиғи жату жағдайында, қосымша сынама алмастан-ақ, мақсатты компоненттердің құрамын жедел анықтауға мүмкіндік береді. Соның нәтижесінде талдау уақыты бірнеше минутқа, тіпті секундтарға дейін қысқарып, алынатын деректер көлемі қажетті деңгейде сақтала отырып, зерттеу құны бірнеше есеге төмендейді.

Нәтижелер мен қорытындылар. Зерттеу нәтижелері –1 мм класына дейін ұсақталған репрезентативті үлгілерде мыстың құрамын рентгендік флуоресценция әдісімен анықтауға негізделген базалық сынауды жүргізудің тиімділігін көрсетті. Сонымен қатар керннің өзінен, атап айтқанда оның кесілген бөлігінің тегістелген және дөңгелектенген беттерінен алынған неғұрлым репрезентативті сынамалар кен мен жанасушы тау жыныстарының шекарасын жедел ажыратуға мүмкіндік береді.

Түйін сөздер: рентгендік радиометриялық сынау, стандартты сынау әдісі, репрезентативтілігі

©Айткалиев А.К.^{1*}, Пак Ю.Н.¹, Колмаков Ю.В.², Пак Д.Ю.¹,
Матишев Т.В.³, 2026.

¹Карагандинский технический университет, Караганда, Казахстан;

²Томский политехнический университет, Томск, Россия;

³Корпорация Казахмыс, Караганда, Казахстан.

*E-mail: aitkaliyev86@gmail.com

ПРИМЕНЕНИЕ РЕНТГЕНРАДИОМЕТРИЧЕСКОГО МЕТОДА ДЛЯ СОВЕРШЕНСТВОВАНИЯ ОПЕРАТИВНОГО КОНТРОЛЯ КАЧЕСТВА МЕДНЫХ РУД ПРИ ГЕОЛОГИЧЕСКОМ ОПРОБОВАНИИ

Айткалиев Ардак — магистр, Карагандинский технический университет, Караганда, Казахстан,

E-mail: aitkaliyev86@gmail.com, <https://orcid.org/0009-0002-7305-8644>;

Пак Юрий — доктор технических наук, профессор, Карагандинский технический университет, Караганда, Казахстан,

E-mail: pak_gos@mail.ru, <https://orcid.org/0000-0002-0699-6764>;

Колмаков Юрий — доктор геолого-минералогических наук, ассоциированный профессор, Томский политехнический университет, Томск, Россия,

E-mail: kolmakovyv@tpu.ru, <https://orcid.org/0009-0002-7305-8644>;

Пак Дмитрий — кандидат технических наук, ассоциированный профессор, Карагандинский технический университет, Караганда, Казахстан,

E-mail: pak_kargtu@mail.ru, <https://orcid.org/0000-0002-7215-7846>;

Матишев Талгат — горный инженер-геолог, корпорация «Казахмыс», Караганда, Казахстан,

E-mail: matishevt@mail.ru, <https://orcid.org/0009-0008-0333-0466>.

Аннотация. *Актуальность.* Традиционное опробование медных руд характеризуется высокой трудоёмкостью, длительностью технологического процесса и сравнительно низкой представительностью, поскольку на химический анализ направляется ограниченное количество материала (около 50 г) (Industry Standard, 2005; Instruction on Internal, 1982). *Цель исследования* - совершенствование существующей системы стандартного опробования медных руд в направлении снижения финансовых затрат и трудоёмкости, повышения оперативности и точности получения представительной информации о содержании меди по данным kernового опробования. Контроль качества руд при добыче традиционно осуществляется методом kernового опробования. Однако используемые на предприятиях методы включают этапы отбора, транспортировки, подготовки и лабораторного анализа проб, что делает их трудоёмкими, дорогостоящими и малопригодными для оперативного управления технологическими процессами. *Методы.* В этой связи значительные перспективы представляет применение рентгенорадиометрического опробования (РРО), позволяющего проводить экспрессное определение содержания элементов без отбора проб непосредственно в условиях естественного залегания горных пород и руд. Данный метод обеспечивает сокращение времени анализа до

нескольких минут или секунд, значительное снижение стоимости работ и увеличение объёма получаемой информации до необходимого уровня полноты. *Результаты и выводы.* Полученные результаты свидетельствуют о возможности эффективного kernового опробования с использованием рентгенофлуоресцентного анализа меди в измельчённых представительных пробах класса –1 мм. Установлено, что более представительное опробование непосредственно по керну (включая округлые и плоские поверхности распиленного керна) позволяет оперативно выделять рудные и пустые интервалы, что повышает эффективность геолого-технологического контроля и обеспечивает более точную оценку содержания меди.

Ключевые слова: рентгенорадиометрическое опробование, стандартный способ опробования, представительность

Introduction. The standard core sampling method includes the following steps:

- core description by its visual description by geologist;
- core sawing along its axis in two halves;
- sampling of one half of the core for further testing, the second half is stored;
- ragging of core samples to a fraction class - 1 mm;
- abrasion of samples to the fraction of analytical powder class - 0.074 mm;
- chemical analysis.

Literature Review. For small to medium capacity plants under operation and under designing, pre-concentration is an effective solution to compensate for the decrease in valuable component content. For polymetallic ores it is advisable to use X-ray fluorescence separation, which allows for taking into account the content of several valuable components in the screened knobs (Efremova et al., 2017).

The mining industry includes production branches engaged in exploration of mineral deposits, their extraction from the subsoil and concentration. At all stages of the technological process of extraction of mineral resources (MR) from the subsoil, starting from prospecting and exploration of deposits, there is a sequential concentration of the valuable component (VC) in the marketable product, and each stage is characterized by its losses of MR (Marchevskaya, 2001).

To reduce ore dilution at the stage of mining operations, process selection of ore can be applied by batch excavation of blocks according to the grade plan defining the boundaries of the external overburden, mineralized mass and ore zone, which, in turn, can be divided into two sub-zones according to their total gold balance content, for example: poor and rich zones. Economic profitability of processing of poor in gold content ore can be achieved due to the introduction of low-cost technology of preliminary ore concentration by the method of lump separation based on the X-ray radiometric method (Zabolotskiy and Nerushchenko, 2021).

A preliminary trade-off study of various concentration scenarios has shown that the optimal approach consists in maximizing tungsten recovery in a rough

concentrate containing tungsten in an amount that, according to the practice of Chinese concentrate producers, allows for its cost-efficient processing by the flotation method (0.18-0.2% WO₃). The research was aimed at determining a method allowing for maximizing the extraction of tungsten in the concentrated product of the above composition. Calculations have shown that in order to obtain the required concentrate from ore with the initial content of 0.12-0.15 % WO₃, the tungsten content in the separation tailings should be at the level of 0.02-0.035 % WO₃. In the course of research, it was found out that due to natural features of the ore being studied (chemical and mineral composition, textural and structural characteristics), the best results were obtained using X-ray absorption technology (Kulmukhamedov and Ligay, 2023).

The totality of methodological and hardware developments ensured the status of X-ray radiometric testing (XRT) as the main tool for geological monitoring of exploration and mining operations. According to the results of XRT in the ores of the deposits, new elements were revealed (Yefimenko et al., 2014).

The existing standard method of coal testing involves labor-intensive operations: collection of point (primary) samples from the tested batch, crushing of the combined sample, averaging, grinding and direct thermal gravimetric analysis of analytical samples (~0.1 mm) for ash content. At each stage of standard testing, an error can occur due to the heterogeneity of coals (Starchik and Pak, 1985).

The closest in technical essence and achieved result method is the method consisting in recording the element and gamma radiation scattered by the substance along with X-ray fluorescence radiation, while concentration of the identified element is estimated by the value of the spectral ratio, that is ratio of the intensity of X-ray fluorescence of the element to the intensity of scattered gamma radiation (Leman, 1978).

X-ray imaging is a low-cost and powerful technology that is widely used in medical diagnostics and non-destructive industrial inspection. Ability of X-rays to penetrate the body represents a major advancement for non-invasive imaging of its internal structure (Zhu et al., 2019).

Problems related to the influence of artifacts on the quality of assessing the internal structure of control objects in X-ray computer tomography continue to be one of the most important areas of research (Xiangyu Ou, 2021; Sarkar, 2019; Dremel, 2017; Stolfi, 2018; Hsieh, 2015).

Materials and Basic Methods. Disadvantages of the Standard Testing Method Core Documentation.

At many deposits, known ore-free intervals are rejected during core description to save further core sawing and laboratory analytical studies. However, the visual approach often results in a loss of quality characterization of the core. Therefore, there is a loss of ultimate content. An example is presented below.

Example. The geological structure of the Zhaissan ore field is formed by granitoids of the Kurday-Chatyrkul complex, which belong to the Upper Ordovic.

The deposit is composed of the following rock types: granodiorites, biotite granites and biotite corniferous granites.

Granodiorites compose the northern and northeastern parts of the deposit. The rest of the deposit is composed of biotite granites.

Contacts of granodiorites with granites are intrusive and rather uneven. Granites often go far into granodiorites in the form of bays, and rest in them in the form of separate bunches.

In the south-eastern part of the deposit in the contact zone of granites and granodiorites, minor bodies of biotite corniferous granites with unclear contacts and gradual transitions into them are developed. There is an opinion that biotite corniferous granites are endocontact margins of the granodiorites as a result of differentiation of intrusive granitic magma into granodiorites (Avdeev, 2018).

Granites and granodiorites are intersected by dikes of aplite-like fine-grained granites, pegmatoid granites, microdiorites, diorite and diabase porphyrites, quartz-carbonate and quartz-magnetite veins.

Dikes of aplite-like and pegmatoidal fine-grained granites mainly gravitate to the near-contact zone of granodiorites and biotite corniferous granites. These dikes occur less frequently in biotite granites.

Dikes of microdiorites and diabase porphyrites are common in both granites and granodiorites (Zablyudsky et al., 2016).

- copper cutoff grade for the deposit - 0.80%
- minimum thickness of the ore body included in the mineral resource volumetrics polygon - 1.0 m
- maximum thickness of substandard ores and waste layers included in the contour of the ore body - 3.0 m



Figure 1 - PHOTO of core UH-ZSN-95-25 in the interval of sample 20025

As can be seen from Figure 1, the core is ore-free visually and according to the geologist's description, but according to the LAI data. According to the standard sampling method, well UH-ZSN-95-25-20026 should be ore-free, since the final sampling intervals should be ore-bearing with intermediate rocks tacked on.

Table 1 – Testing of Well UH-ZSN-95-25

No.	Samples	Interval		Cu, % (0.0005-10)
		from	to	
1	UH-ZSN-95-25-20001	blank		0.017
2	UH-ZSN-95-25-20002	41	41.7	0.209
3	UH-ZSN-95-25-20003	41.7	42.4	0.082
4	UH-ZSN-95-25-20004	42.4	43	0.152
5	UH-ZSN-95-25-20005	43	44	0.404
6	UH-ZSN-95-25-20006	44	45	0.220
7	UH-ZSN-95-25-20007	45	46	0.527
8	UH-ZSN-95-25-20008	46	47	1.17
9	UH-ZSN-95-25-20009	47	48	0.202
10	UH-ZSN-95-25-20010	48	48.6	0.732
11	UH-ZSN-95-25-20011	48.6	49.3	2.91
12	UH-ZSN-95-25-20012	49.3	50.3	1.45
13	UH-ZSN-95-25-20013	field duplicate		0.700
14	UH-ZSN-95-25-20014	pulp duplicate		1.44
15	UH-ZSN-95-25-20015	grinding duplicate		1.49
16	UH-ZSN-95-25-20016	CRM		0.441
17	UH-ZSN-95-25-20017	50.3	51.3	1.08
18	UH-ZSN-95-25-20018	51.3	52.3	2.38
19	UH-ZSN-95-25-20019	52.3	53	0.281
20	UH-ZSN-95-25-20020	53	54	0.793
21	UH-ZSN-95-25-20021	54	55	0.242
22	UH-ZSN-95-25-20022	55	56	0.150
23	UH-ZSN-95-25-20023	56	57	0.505
24	UH-ZSN-95-25-20024	57	58	0.455
25	UH-ZSN-95-25-20025	58	59	0.876
26	UH-ZSN-95-25-20026	59	60	0.962

Core Sawing Operations. According to the traditional method, the core is sawn along its axis in half, with one half of the core sampled for further testing and the other half retained for storage.

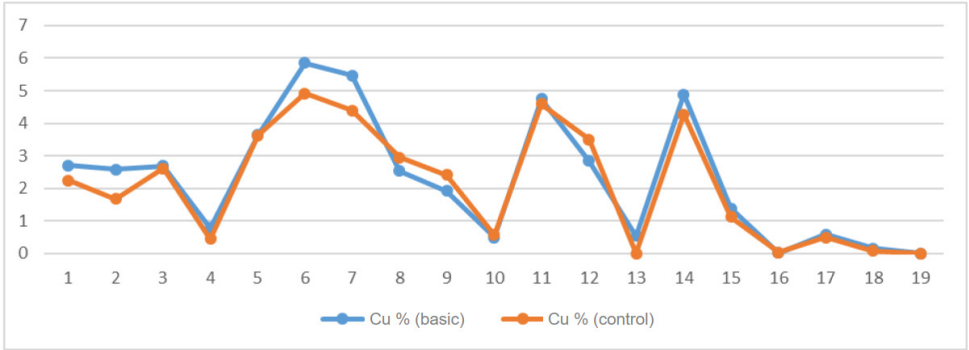


Figure 2 - Diagram of Comparing Two Core Halves

As can be seen from Figure 2 the heterogeneity of minerals occurrence is clearly visible, the two halves of the core are not always identical in terms of copper content.

Sample Preparation and Chemical Analysis

- Ragging of core samples to a fraction class - 1 mm;
- Abrasion of samples to the fraction of analytical powder class - 0.074 mm;
- Chemical analysis.

Table 2 - Sample Weight at Different Stages of Testing

Stage No.	State	Sample Weight
1	full core	5.0 kg
2	sawn core	2.5 kg
3	crushed fraction	1.2 kg
4	abrasion	0.3 kg
5	chemical analysis	0.05 kg

As shown in Table 2, the core sample originally weighed 5.0 kg, but was crushed to below 50 grams for chemical analysis. Consequently, the loss of sample representativeness is estimated to be at least 100 times.

The accuracy and precision of X-ray radiometric testing is usually assessed by comparing its data with the results of standard testing, the final step of which is most often chemical analysis for copper content. In this approach, the results of a standard testing are usually taken as true. Therefore, the researchers' actions are aimed at minimizing random discrepancies between the X-ray radiometric method and chemical analysis data, while taking into account tolerances adopted by the relevant standards. However, these tolerances only apply to the final stage of testing, i.e. at the stage of abrasion to analytical powder.

Labor intensity is reduced by eliminating a number of standard testing operations (crushing, grinding, reduction and abrasion of samples to analytical size) (Pak Yu. and Pak D., 2016).

It should be noted that the chain from the traditional testing method was used to ensure integrity of the research for the purpose of finding an optimal method.

The same copper ores of the Zhaissan deposit from the area belonging to Kazakhmys Corporation LLP were subjected to X-ray radiometric testing: in the amount of 5 linear meters or 5 core samples. XRT was conducted at 4 stages of sample preparation (rounded core, sawn core material, crushed fraction up to grade - 1 mm, analytical powder fraction of the grade - 0.074 mm). At the sample preparation stages of the rounded and sawn core, for each 1-meter core sample, 13 measurements were taken and averaged, according to the crushed fractions: class -1 mm - 10 measurements, class -0.074 - 5 measurements (see the below) (Pak et al., 2024).

An Niton analog X-ray radiometric testing instrument was used for the

experiment. However, this does not change the essence of the test method itself, as the rapid analysis methodology can be applied to other devices of this type (Pak et al., 2025).

Results and Discussion. For the purpose of verifying the accuracy of the measurements, the instrument was calibrated using the certified VIMS reference standards in the form of analytical powder of the fraction class - 0.074 mm, and ore types of the same deposit were used. For stable operation, the instrument was calibrated using the reference standards before each measurement at the different stages of sample preparation.

Table 3 - Comparison of XRT and Chemical Analysis of the Reference Standards

Name	XRT, %	chemical analysis, %	deviation
VIMS 33620	0.444	0.433	-0.011
VIMS 33920	3.065	3.08	0.015



Figure 3 - Geological Core for XRT

As Table 3 shows, the deviations are extremely minimal, the XRT confirms the chemical analysis data.

Full core. The wells were drilled using the core drilling method with coring. Drilling with diameter NQ 75.3 mm, core diameter of 47.6 mm (Figure 1). XRT was performed on the rounded portion from two core planes with the intervals of 7 cm along the axis, and the data were averaged using 13 measurements.

Within the interval of 67 and 70 m. Ore zone. Quartz-magnetite-chalcopyrite vein. The host rock is granite up to the depth of 70.0m. Chalcopyrite is developed in the form of nests, which are 1x2.5 cm in size, vein-like spots. Chalcopyrite for the entire interval is approximately 10-12% of the total core volume. Fracturing is weak.

XRT for the Core

Table 4- Comparison of Averaged XRT Data of Rounded Core of Both Planes

UH- ZSN-93-25	XRT, %				
	int 65-66 m	int 66-67 m	int 67-68 m	int 68-69 m	int 69-70 m
region-1	0.165	0.019	3.464	2.93	0.333
region-2	0.205	0.019	1.913	2.883	0.338
average	0.185	0.019	2.689	2.907	0.336


Based on the data in Table 4, in the interval of 67-68 m, there is a nonuniformity in the natural occurrence of the Cu ore element, which affects the final average value for the interval. At the same time, the other intervals have similar results.

Sawn core. The core was sawn by a stone cutting machine into 2 halves along its axis, one half was packed in a sample bag and sent to the laboratory for sample preparation and chemical analysis, and the second half of the core was placed in a core box for storage. In this case, the flat surfaces of both core halves were pre-exposed to XRT at 7 cm intervals, multi-point measurements per 1 meter were also averaged.

Table 5 – Comparison of Averaged XRT Data of the Sawn Core by Their Flat Sides

UH- ZSN-93-25	XRT, %				
	int 65-66 m	int 66-67 m	int 67-68 m	int 68-69 m	int 69-70 m
saw-1	0.278	0.029	1.929	2.678	0.369
saw-2	0.185	0.022	3.369	3.024	0.419
average	0.232	0.026	2.649	2.851	0.394

Based on the data in Table 5, and in the interval of 67-68 m, there is a nonuniformity in the natural occurrence of the Cu ore element, which affects the final average value for the interval. At the same time, the other intervals again have similar results.

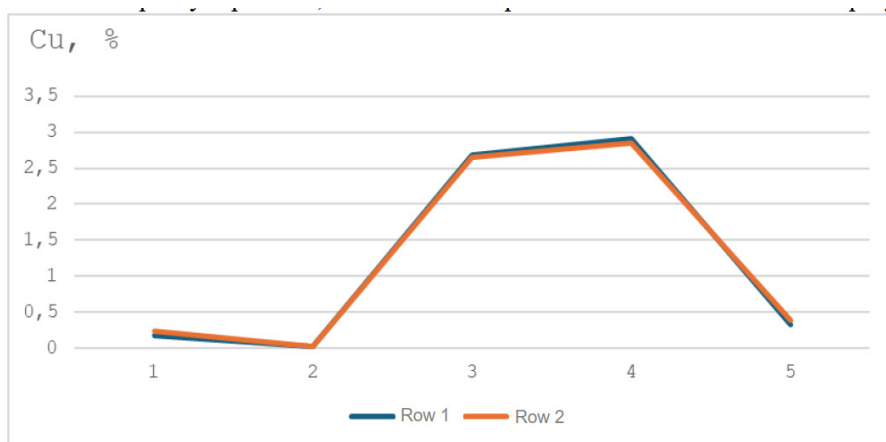

Row 1 – rounded core, Row 2 – sawn core,

1 - int 65-66 m, 2 - int 66-67 m, 3 - int 67-68 m, 4 - int 68-69 m, 5 - int 69-70 m

Figure 5 – XRT for Cu. Comparison of the Rounded and Sawn Core

As Figure 5 shows, the sensitivity of the core to copper is within the limits for both the rounded core and the sawn core, the results are identical.

Crushed fraction and analytical powder. The sample was prepared by KazGidroMed LLP. Sample was processed using drying, crushing to the grade fraction of 1 mm, quartering and abrasion of core samples to an analytical powder of grade of 0.074 mm.

XRT measurements were made using the crushed fraction (Table 6) and the analytical powder (Table 7). The crushed fraction was evenly scattered into a tray with the dimensions of 15*20 cm, and about 1 cm thick, and the analytical powder was scattered into a tray of 15 cm diameter, also about 1 cm thick, as shown in Figure 6.



Figure 6 - Crushed Fraction (Left) and Analytical Powder (Right) for XRT

Table 6 - XRT of Crushed Fraction of the Class of 1 mm

Measurement No.	XRT, %				
	int 65-66 m	int 66-67 m	int 67-68 m	int 68-69 m	int 69-70 m
average	0.294	0.034	2.433	1.892	0.631

The spread of XRD data for the crushed fraction is characterized by natural nonuniformity of rock occurrence.

Table 7 - XRT of Analytical Powder with Fraction Class of 0.074 mm

Measurement No.	XRT, %				
	int 65-66 m	int 66-67 m	int 67-68 m	int 68-69 m	int 69-70 m
average	0.301	0.042	2.284	2.014	0.591


The data from Tables 6 and 7 show that the XRT produce similar results for both the analytical powder and crushed fraction samples, despite some natural nonuniformity in the larger grade fraction of 1 mm compared to the grade fraction of 0.074 mm.

Chemical analysis. All samples in the form of analytical powder with fraction of 0.074 mm were analyzed in the same chemical laboratory of KazGidroMed LLP by the semi-quantitative ICP-OES method for Cu (Table 8).

Table 8 – Chemical Analysis of the Analytical Powder of Class of 0.074 mm

No.	Interval	chemical analysis - Cu, %
1	65-66 m	0.307
2	66-67 m	0.033
3	67-68 m	2.30
4	68-69 m	1.90
5	69-70 m	0.607

The problems of ensuring the required precision and accuracy of the standard methods of testing are especially relevant in connection with the intensive development of instrumental nuclear geophysical methods of quality control for various raw materials. For the purpose of defining correctness of the X-ray radiometric testing data, *the XRT and chemical analysis data were compared* (Figure 7).

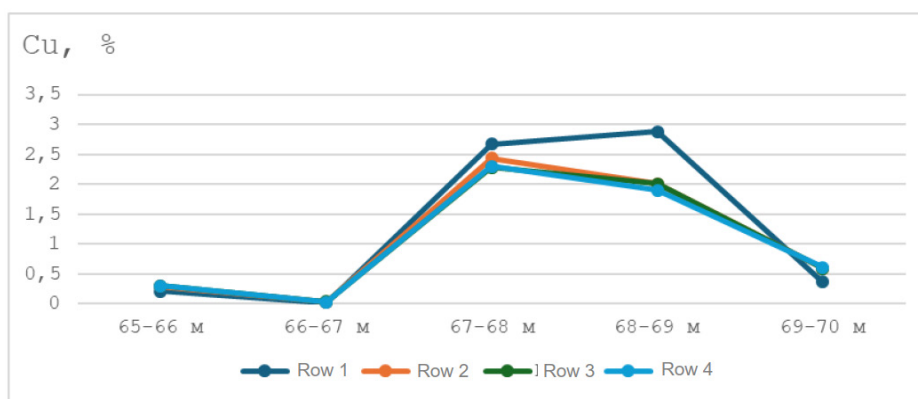

Row 1 – XRT core, Row 2 – XRT - 1mm, Row 3 – XRT - 0.074 mm, Row 4 - chemical analysis.
Figure 7 – Comparison of XRT and Chemical Analysis for Cu

Figure 7 shows the results of the XRT study for the 5 core intervals and chemical analysis. The data indicate satisfactory convergence.

Conclusion. To increase the accuracy of quantitative determinations of Cu contents, it is necessary to switch to denser calibration standards by pressing analytical powder, and obtain a statistically reliable dependence of the correction factor for various classes of Cu content in the ore.

In cases of uneven distribution of productive mineralization, a higher representativeness of the RPO has been established in comparison with the standard method of core sampling by chemical analysis.

Even with the results achieved, the high efficiency of the RPO allows us to recommend it as the main method for ore quality control during the development of deposits. Representative core sampling using the X-ray radiometric method (rounded and sawn flat surfaces) makes it possible to confidently separate ore and rock intervals.

Studies have shown that, due to its efficiency and sufficient representativeness, X-ray radiometric testing can be recommended not only during the development of deposits, but also in laboratory conditions for determining the copper content in samples of class -1 mm.

References

- Aitkaliyev A., Pak D., Pak Yu., Matishev T., Kolmakov Yu. (2020) Improving Copper Ore Geological Testing Based on Operational Control of its Quality by the X-Ray Radiometric Method. *Journal of Mining Institute*. – Vol. 244. – P. 668–674. DOI: 10.31897/PMI.2020.4.668 (in Eng.).
- Avdeev S.L. (2018) Otchet o rezul'tatah otsenochnykh (soprovozhdayushchikh) rabot – dorazvedka na mestorozhdenii Shatyrgul' za 2018 g. [Report on the Results of Appraisal (Accompanying) Works – Additional Exploration at the Shatyrgul Deposit for.]. (in Russ.).
- Dremel K., Fuchs T. (2017) Scatter Simulation and Correction in Computed Tomography: A Reconstruction-Integrated Approach Modeling the Forward Projection. *NDT & E International*. – Vol. 86. – Pp. 132–139. <https://doi.org/10.1016/j.ndteint.2017.01.008>. (in Eng.).
- Efimenko S.A., Portnov V.S., Tursunbayeva A.K., Mausymbayeva A.D. (2009) Oprobovanie mednykh rud mestorozhdeniy Kazakhstana rentgenoradiometricheskimi metodami. [Sampling of Copper Ores from Kazakhstan Deposits by X-Ray Radiometric Method]. *Journal of Siberian Federal University. Engineering & Technologies*. – Vol. 2. – No. 4. – Pp. 345–358. (in Russ.).
- Efremova T.A., Tsypin E.F., Ovchinnikova T.Yu., Mamonov S.V., Elizarov D.B. (2017) Rentgenoradiometricheskaya separatsiya polimetallicheskoj rudy. *Gornyy zhurnal*. [X-ray radiometric separation of polymetallic ore. *Gornyi Zhurnal (Mining Journal)*]. – No. 7. – Pp. 113–119. DOI: 10.21440/0536-1028-2017-7-113-119. (in Russ.).
- Hsieh J. (2015) *Computed Tomography: Principles, Design, Artifacts, and Recent Advances*. – Bellingham, WA, USA: SPIE. <https://doi.org/10.1117/3.2188302>. (in Eng.).
- Kulmukhamedov G.K., Ligai A.B. (2023) Primenenie rentgenovskikh metodov separatsii dlya predvaritelnogo obogashcheniya volframovykh rud Verkhne-Kairaktinskogo mestorozhdeniya. [Application of X-ray Separation Methods for Pre-concentration of Tungsten Ores of the Verkhne-Kairakty Deposit]. *Report/Proceedings, Severniy Katpar LLP*. – Pp. 227–235. (in Russ.).
- Lehman E.P. (1978) *Rentgenoradiometricheskii metod oprobovaniya mestorozhdeniy tsvetnykh i redkikh metallov*. [X-Ray Radiometric Method of Testing Deposits of Non-Ferrous and Rare Metals]. 2nd ed., revised and expanded. – Leningrad: Nedra. – 231 p. (in Russ.).
- Marchevskaya V.V. (2001) *Formirovanie rudopotoka na informatsionnoy osnove radiometricheskikh metodov oprobovaniya i razdeleniya poleznykh iskopaemykh: na primere medno-nikelevykh rud mestorozhdeniy Pechenskogo rudnogo polya*. Candidate Dissertation, Apatity, 226 pages. [Formation of Ore Flow Based on the Information Approach of Radiometric Methods for Sampling and Separation of Mineral Resources: on the Example of Copper-Nickel Ores of the Pechenga Ore Field Deposits: dissertation ... Candidate of Technical Sciences: 25.00.22, 25.00.13]. – Apatity, 2001. – 226 p. – RGB OD, 61 02-5/821-8. (in Russ.).
- Ou X., Chen X., Xu X., Xie L., Chen X., Hong Z., Bai H., Liu X. (2021) Recent Development in X-Ray Imaging Technology: Future and Challenges. (in Eng.).
- Pak Yu.N., Pak D.Yu. (2016) *Yadernye tekhnologii v geofizicheskikh issledovaniyakh: uchebnoe posobie*. [Nuclear Technologies in Geophysical Research]. Textbook. – Karaganda: KSTU Publishing House. – 346 p. (in Russ.).
- Pak Yu.N., Pak D.Yu., Aitkaliyev A.K., i dr. (2024) Evraziyskiy patent № 047642 «Instrumental'nyy sposob rentgenoradiometricheskogo analiza rud slozhnogo sostava». [Eurasian Patent No. 047642 “Instrumental Method of X-Ray Radiometric Analysis of Complex Composition Ore”]. (in Russ.).
- Pak Yu.N., Pak D.Yu., Aitkaliyev A.K., i dr. (2025) Evraziyskiy patent № 049177 «Sposob yaderno-radiometricheskogo oprobovaniya ugley». [Eurasian Patent No. 049177 “Method of Nuclear Radiometric Testing of Coals”]. (in Russ.).

Sarkar S., Wahi P., Munshi P. (2019) An Empirical Correction Method for Beam-Hardening Artifact in Computerized Tomography (CT) Images. *NDT & E International*. – Vol. 102. – Pp. 104–113. <https://doi.org/10.1016/j.ndteint.2019.03.002>. (in Eng.).

Standart otrasli (2005) Upravlenie kachestvom analiticheskikh rabot. *Metody geologicheskogo kontrolya kachestva analiticheskikh rabot. (FGUP VIMS). [Industry standard Quality management of analytical works. Methods of geological quality control of analytical works. FSUE VIMS]*. (in Russ.).

Starchik L.P., Pak Yu.N. (1985) *Yaderno-fizicheskie metody kontrolya kachestva tverdogo topliva. [Nuclear-physical Methods of Quality Control of Solid Fuel]*. – Moscow: Nedra. – 224 p. (in Russ.).

Stolfi A., De Chiffre L., Kasperl S. (2018) Error Sources. *Industrial X-Ray Computed Tomography*. – Berlin, Germany: Springer. – Pp. 143–184. https://doi.org/10.1007/978-3-319-74465-9_7. (in Eng.).

Zabludskiy A.I., Osenin N.T., Baygonov K.M. (2016) *Analiz sostoyaniya razvedannosti mestorozhdeniya Zhaisan i otsenka ego perspektiv za 1977–1978 gg. Pak Yu.N., Pak D.Yu. Yadernye tekhnologii v geofizicheskikh issledovaniyakh: uchebnoe posobie. [Analysis of the Exploration Status of the Zhaisan Deposit and Assessment of Its Prospects for 1977–1978. Pak Yu.N., Pak D.Yu. Nuclear Technologies in Geophysical Research]*. Textbook. – Karaganda: KSTU Publishing House. – 346 p. (in Russ.).

Zabolotskiy A.I., Nerushchenko I.V. (2021) *Predvaritelnoe obogashchenie bednoy rudy mestorozhdeniya Kekura rentgenoradiometricheskim metodom separatsii. [Zabolotskiy A.I., Nerushchenko I.V. Pre-concentration of Low-Grade Ore from the Kekura Deposit Using X-ray Radiometric Separation Method]*. – Mining Journal. – No. 1. – Pp. 134–138. (in Russ.).

Zhu L., Han Y., Li L., Xi X., Zhu M., Yan B. (2019) Metal Artifact Reduction for X-Ray Computed Tomography Using U-Net in Image Domain. *IEEE Access*. – Vol. 7. – Pp. 98743–98754. <https://doi.org/10.1109/ACCESS.2019.2924935>. (in Eng.).

Publication Ethics and Publication Malpractice in the journals of the Central Asian Academic Research Center LLP

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the journals of the Central Asian Academic Research Center LLP implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The Central Asian Academic Research Center LLP follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/ or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the Central Asian Academic Research Center LLP.

The Editorial Board of the Central Asian Academic Research Center LLP will monitor and safeguard publishing ethics.

Requirements for articles design for publication in the journal are available on the websites:

**[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)
<http://www.geolog-technical.kz/index.php/en/>
ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

Managing Editor: *T. Apendiev*
Editors: *D.S. Alenov, A.Shormakova*
Computer layout: *G.D. Zhadyranova*

Signed for print: April 10, 2026
Format: 70×90 1/16. 26.5 printed sheets. Order No. 2.

*«Central Asian Academic Research Center» LLP
Almaty, Shevchenko Street, 28*